

HOIST CHAINS

for manual and motor-driven hoists

ENG
EDITION_3



HOIST CHAINS

for manual and
motor-driven hoists

FOR US THERE IS ONLY ONE OBJECTIVE: BEING BETTER

Advantages „being better“	2
Hoist chains performance/ applications	3
DAT type, case hardened	4
NEW: D-profil-chain version DAT	5
Version T, tempered	6
Version VH, tempered hand chains	7
Version RPA/RSA, rust-free	8
Corrosion protection coatings Standard packing	9
RUD portal	10
Test certificate - RUD hoist chains	11
Wheels and guides	12
Limit gauge	13
Requirements on hoist chains	14
Lubricants/ recommended lubricants	14

CHAIN HARDNESS
Uniform surface hardness
and depth, particulary in
the joints, excellent wear
resistance, long service life.

GEOMETRY
Narrow dimensional
tolerances, symmetrical
link shape, fine control
using take-up wheels.

CALIBRATION
All RUD Hoist Chains
are 100% calibrated.

PRODUCTION
Made in Germany,
at our Aalen-
Unterkochen plant.

DEVELOPMENT
Collaboration with
German technical
institutes and
hoist equipment
manufacturers.

STRENGTH
Outstanding dynamic
strength, maximum
operating safety.

IDENTIFICATION
Chain identification
is essential for clear
safety information
and traceability.

CHAIN DIMENSIONS
RUD makes the smallest
and largest hoist chains
in the world, with sizes
3 x 9 to 32 x 90 mm.

SERVICE
Reliable delivery,
consultation and
technical assistance
worldwide from our
RUD representatives.

WE SUPPLY ALL LEADING OEMS WORLDWIDE
WITH OUR RUD HOIST CHAINS - „MADE IN
GERMANY“

HOIST CHAINS

for manual and
motor-driven hoists

RUD HOIST CHAINS: PERFORMANCE - OVERVIEW



Available in a variety of qualities and sizes on coil or as rods.



The drawing machine draws the material to precisely the desired diameter.




Bending of the individual chain links: Each link is cleanly bent and laced into the next link.



Welding the links after bending.



Stamping the welded chain with critical information: The RUD emblem, quality rating, manufacturing number and batch number.



Case hardened and quenched and tempered chains




Black phosphated, galvanised, special coatings



The chain is precisely sized and loaded with manufacturing proof force.



Quality assurance and acceptance.



Warehousing and shipping.

APPLICATION FOR RUD HOIST CHAINS:
INDUSTRY · WIND POWER STATIONS · STAGE TECHNOLOGY · OFFSHORE



RUD ROUND LINK CHAIN – DAT TYPE

FOR HIGH WEAR RESIS TANCE PER EN 818-7-DAT,
USING MOTOR-DRIVEN HOISTS

DAT/T quality class execution			Quality and designation			RTS	RTD	RTB
Mechanism group ISO 4301-1 (FEM 9.511)	Nominal stress [N/mm²]	Limit stress [N/mm²]	Stress at manufacturing proof force	σ_{FPmin}	N/mm²	500		
M1 (1Dm)	200	250	Stress at breaking force	σ_{Bmin}	N/mm²	800		
M2 (1Cm)	160	225	Total ultimate elongation	A_{min}	%	10		
M3 (1Bm)	160	200	Surface hardened according to DIN EN 818-7	$d \leq 6,5 \varnothing$ $d \geq 7 \varnothing$	HV 5 HV10	500 - 650		
M4 (1Am)	140	180	Case depth in the joint (after macro-etching)	$\dots d \pm 0,01 d$	mm	$\leq \varnothing 4 / 0,05$ $\varnothing 4,1-7 / 0,04$ $\varnothing 8-16 / 0,03$ $\geq \varnothing 16,1 / 0,02$	$< \varnothing 8 / 0,05$ $\varnothing 8-11,5 / 0,04$ $\geq \varnothing 12 / 0,03$	
M5 (2m)	125	160	Fatigue strength		N/mm²	130 ± 80	130 ± 90	130 ± 100
M6 (3m)	112	140						
M7 (4m)	100	125						
M8 (5m)	90	112						

Dimensions [mm]	Material No.	Load capacity Ftr [kg] according to mechanism group				Manufacturing proof force FFPmin [kN]	Breaking force FBmin [kN]	RTS	RTD	RTB	Weight kg/m
		M3 (1Bm)	M4 (1Am)	M5 (2m)	M6 (3m)						
		Nominal stress: 160 N/mm²	Nominal stress: 140 N/mm²	Nominal stress: 125 N/mm²	Nominal stress: 112 N/mm²						
		Safety factor 5	Safety factor 5,7	Safety factor 6,4	Safety factor 7,1						
3 ¹⁾ x 9	7985902	230	200	180	160	7	11,3	x			0,19
4 x 12	7100183	410	350	320	280	12,6	20,1	x	x	x	0,35
5 x 15	7100184	640	560	500	440	19,6	31,4	x	x	x	0,54
6 x 18	7101362	920	800	720	640	28,3	45,2	x	x		0,78
6,3 x 19	7983648	1000	880	790	710	31,2	49,9	x			0,86
6,3 x 19,1	7102922	1000	880	790	710	31,2	49,9	x			0,86
7 x 21	7102168	1250	1090	980	870	38,5	61,6	x	x	x	1,1
7 x 22	7100185	1250	1090	980	870	38,5	61,6	x	x		1,1
7,1 x 20,2	7103637	1250	1090	980	870	39,6	63,3	x		x	1,1
7,1 x 21,2	7102924	1290	1130	1000	900	39,6	63,3	x			1,1
8 x 24	7101363	1640	1430	1280	1140	50,3	80,4	x			1,4
9 x 27	7100186	2070	1810	1620	1450	63,6	102	x	x	x	1,8
10 x 28	7102169	2560	2240	2000	1790	78,5	126	x			2,2
10 x 30,2	7102926	2560	2240	2000	1790	78,5	126	x			2,2
11 x 31	7102955	3100	2700	2420	2160	95	152	x			2,7
11,2 x 34	7993063	3200	2800	2500	2240	98,5	157,6	x			2,7
11,2 x 34,4	7102930	3200	2800	2500	2240	98,5	157,6	x			2,7
11,3 x 31	7992923	3270	2860	2550	2280	100,3	160,5	x	x	x	2,85
13 x 36	59733	4330	3780	3380	3030	132,7	212,3	x		x	3,8
16 x 45	55004	6550	5730	5120	4590	201	322	x		x	5,7
23,5 ¹⁾ x 66	7993516	14100	12370	11000	9900	434	694	x			12,2

1) Dimensions outside of EN 818-7. Other dimensions on request.


The nominal stresses and the limit stresses may not exceed the stresses specified in the respective mechanism groups. Operating temperature - 20° C to + 200° C.

RUD D-PROFILE-CHAIN – DAT TYPE

FOR HIGH WEAR RESISTANCE PER EN 818-7-DAT,
USING MOTOR-DRIVEN HOISTS

DAT/T quality class execution			Quality and designation			RTS	RTD	RTB
Mechanism group ISO 4301-1 (FEM 9.511)	Nominal stress [N/mm²]	Limit stress [N/mm²]	Stress at manufacturing proof force	σ_{FPmin}	N/mm²	500		
M1 (1Dm)	200	250	Stress at breaking force	σ_{Bmin}	N/mm²	800		
M2 (1Cm)	160	225	Total ultimate elongation	A_{min}	%	10		
M3 (1Bm)	160	200	Surface hardness according to DIN EN 818-7	$d \leq 6,5 \varnothing$ $d \geq 7 \varnothing$	HV 5 HV10	500 - 650		
M4 (1Am)	140	180	Case depth in the joint (after macro-etching)	$\dots d \pm 0,01 d$	mm	$\leq \varnothing 4 / 0,05$ $\varnothing 4,1-7 / 0,04$ $\varnothing 8-16 / 0,03$ $\geq \varnothing 16,1 / 0,02$	$< \varnothing 8 / 0,05$ $\varnothing 8-11,5 / 0,04$ $\geq \varnothing 12 / 0,03$	
M5 (2m)	125	160	Fatigue strength		N/mm²	130 ± 80	130 ± 90	130 ± 100
M6 (3m)	112	140						
M7 (4m)	100	125						
M8 (5m)	90	112						

Dimensions [mm]	Quality	Material No.	Load capacity Ftr [kg] according to mechanism group				Manufacturing proof force FFPmin [kN]	Breaking force FBmin [kN]	Manufacturing lenght	Weight kg/m
			M3 (1Bm)	M4 (1Am)	M5 (2m)	M6 (3m)				
			Nominal stress: 160 N/mm²	Nominal stress: 140 N/mm²	Nominal stress: 125 N/mm²	Nominal stress: 112 N/mm²				
			Safety factor 5	Safety factor 5,7	Safety factor 6,4	Safety factor 7,1				
3,7 x 12	RTD	7907103	380	340	320	270	12,6	20,1	200 m	0,34
3,75 x 10,75	RTS	7909389	380	340	320	270	12,6	20,1	200 m	0,34
5 x 14,3	RTD	7907401	630	600	540	480	21,3	34,0	200 m	0,61
5,25 x 15	RTS	7908823	800	670	630	530	24,7	39,5	200 m	0,59
7 x 21	RTD	7903473	1400	1220	1090	970	43	68,8	100 m	1,20
7,45 x 23	RTS	7909391	1540	1350	1200	1080	50	80	150 m	1,35
9,6 x 30	RTD	7907402	2560	2240	2000	1790	78,5	126	100 m	2,15

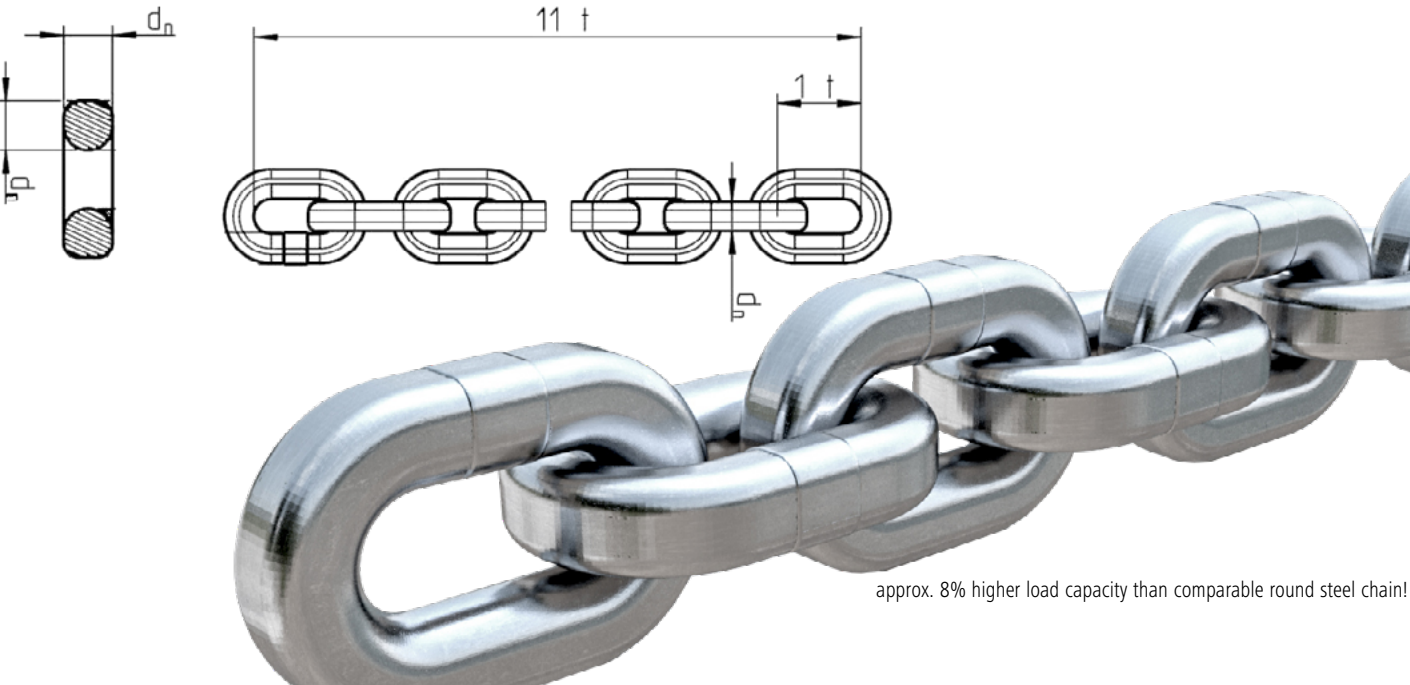

approx. 8% higher load capacity than comparable round steel chain!

RUD HOISTING CHAINS - T TYPE

FOR LOW/MODERATE WEAR APPLICATIONS PER EN 818- 7-T,
SPECIAL DESIGNED FOR MANUAL HOISTS

Quenched and tempered



Quality and designation				RT
Stress at manufacturing proof force		σ_{FPmin}	N/mm ²	500
Stress at breaking force		σ_{Bmin}	N/mm ²	800
Total ultimate elongation		A _{min}	%	10
Surface hardness in the joint			HV10	360

Dimensions [mm]	Material No.	Load capacity F _{tr} [kg] according to mechanism group					Manu- facturing proof force F _{FPmin} [kN]	Breaking force F _{Bmin} [kN]	Weight kg / m
		Hand (1Dm)	M3 (1Bm)	M4 (1Am)	M5 (2m)	M6 (3m)			
		Nominal stress: 200 N/mm ²	Nominal stress: 160 N/mm ²	Nominal stress: 140 N/mm ²	Nominal stress: 125 N/mm ²	Nominal stress: 112 N/mm ²			
		Safety factor 4	Safety factor 5	Safety factor 5,7	Safety factor 6,4	Safety factor 7,1			
3 ¹⁾ x 9	7989206	280	230	140	180	160	7	11,3	0,19
4 x 12	53804	510	410	350	320	280	12,6	20,1	0,35
4,2 x 12,2	7983725	560	440	390	350	310	13,8	22,0	0,38
5 x 15	53008	800	640	560	500	440	19,6	31,4	0,54
5,6 x 15,8	7990657	1000	800	700	630	560	24,6	39,4	0,70
5,6 x 17	57165	1000	800	700	630	560	24,6	39,4	0,68
6 x 18	56680	1150	920	800	720	640	28,3	45,2	0,78
6 x 18,5	60144	1150	920	800	720	640	28,3	45,2	0,8
6,3 x 19	7985347	1270	1010	880	790	710	31,2	49,9	0,86
6,3 x 19,1	53012	1270	1010	880	790	710	31,2	49,9	0,86
7 x 22	7901147	1560	1250	1090	980	870	38,5	61,6	1,1
7,1 x 20,1	7990660	1560	1250	1090	980	870	39,6	63,3	1,09
7,1 x 21	53016	1560	1250	1090	980	870	39,6	63,3	1,1
7,1 x 21,2	62168	1560	1250	1090	980	870	40	67	1,1
8 x 24	62162	2050	1640	1430	1280	1140	50,3	80,4	1,4
9 x 24,8	7990664	2,590	2070	1810	1620	1470	63,6	102,0	1,82
9 x 27	55376	2590	2070	1810	1620	1470	63,6	102	1,8
10 x 28	7101451	3200	2560	2240	2000	1790	78,5	126	2,2
10 x 28,1	7990789	3200	2560	2240	2000	1790	78,5	126,0	2,23
10 x 30	57862	3200	2560	2240	2000	1790	78,5	126	2,2
11 x 31	60931	3870	3100	2710	2420	2170	95	152	2,7
11,2 x 34	53028	4010	3200	2810	2500	2250	98,5	157,6	2,7
13 x 36	53030	5400	4320	3780	3380	3030	132,7	212,3	3,8
16 x 45	53017	8150	6550	5730	5110	4590	201	322	5,7
22 x 66	7989369	15500	12500	10840	9680	8680	400	630	10,7
23,5 ¹⁾ x 66	7992988	17680	14140	12380	11050	9900	434	694	12,2
32 ¹⁾ x 90	7993904	32790	26200	22950	20480	18360	780	1286	21,3

¹⁾ Dimensions outside of above mentioned standards. Other dimensions on request.

The nominal stresses and the limit stresses may not exceed the stresses specified in the respective mechanism groups. Operating temperature - 40° C to + 200° C

RUD ROUND LINK CHAIN – TYPE VH

FOR USE IN MANUAL HOISTS
ISO 16872

Quenched and tempered



Quality and designation				VH
Stress at manufacturing proof force		σ_{FPmin}	N/mm ²	625
Stress at breaking force		σ_{Bmin}	N/mm ²	1000
Total ultimate elongation		A _{min}	%	17
Surface hardness in the joint			HV10	min. 430

Dimensions [mm]	Material No. „nature black“	Load capacity F _{tr} [kg] according to mechanism group	Manufacturing proof force F _{FPmin} [kN]	Breaking force F _{Bmin} [kN]	Weight kg /m
		Load traction force: 250 N/mm ²			
		Safety factor 4			
4 x 12	7905884	630	15,7	25,1	0,35
5 x 15	7901430	1250	30,8	49,3	0,68
6,3 x 19,1	7900646	1600	39	62,3	0,86
7,1 x 21	7901086	2000	49,5	79,2	1,1
8 x 24	7900679	2500	62,8	101	1,4
9 x 27	7900680	3150	79,5	127	1,8
10 x 30	7900925	4000	98,2	157	2,2
10 x 30,2	7901061	4000	98,2	157	2,2

Chains in accordance with ISO 16872 may only be installed/used in manually operated hoists.
Operating temperature - 40° C to + 150° C

RUD HAND CHAINS – FOR MANUAL HOIST

Galvanised hand chain, not certificated		
Dimensions	Designation	P/n [100 m length]
5 x 18,5	galvanised hand chain	8502628
5 x 23,5	galvanised hand chain	8502627
5 x 23,8	galvanised hand chain	8502970
5 x 24	galvanised hand chain	8502626
5 x 25	galvanised hand chain	8502563
5 x 25,2	galvanised hand chain	8502629
5 x 26	galvanised hand chain	8502632
5 x 18,5	open chain link	7101773
5 x 24	open chain link	7101770
5 x 25	open chain link	59381

1.4404 stainless steel hand chain, not certificated		
Dimensions	Designation	P/n
5 x 18,5	stainless steel hand chain	63656
5 x 24	stainless steel hand chain	7103866
5 x 25	Stainless steel hand chain	53943
5 x 25,2	stainless steel hand chain	62473
5 x 18,5	open chain link	8500193
5 x 25	open chain link	8500194





Quality classes RPA and RSA				
Mechanism group ISO 4301-1 (FEM 9.511)	Nominal stress: [N/mm²]		Limit stress [N/mm²]	
	RPA	RSA	RPA	RSA
M1 (1Dm)	125	160	187,5	240
M2 (1Cm)	100	125	138	175
M3 (1Bm)	100	125	125	160
M4 (1Am)	90	112	112	140
M5 (2m)	80	100	100	125
M6 (3m)	70	90	90	112
M7 (4m)	60	80	80	100
M8 (5m)	55	70	70	90



Quality and designation			Quality class P RPA	Quality class S RSA
Material			AISI 316	
Stress at manufacturing proof force	σ_{FPmin}	N/mm²	315	400
Stress at breaking force	σ_{Bmin}	N/mm²	500	630
Total ultimate elongation	Amin	%	15	
Surface hardness in the joint	d ≤ 6,5 Ø d ≤ 7 Ø	HV 5 HV10	ca. 250	

Dimen- sions [mm]	Material No.	Qua- lity class	Load capacity F _r [kg] according to mechanism group					Manu- factu- ring proof force FFPmin [kN]	Brea- king force FBmin [kN]	Weight kg / m
			Hand (1Dm)	M3 (1Bm)	M4 (1Am)	M5 (2m)	M6 (3m)			
			Nominal stress: ≤ Ø 7 = 160 N/mm² ≥ Ø 8 = 125 N/mm²	Nominal stress: ≤ Ø 7 = 125 N/mm² ≥ Ø 8 = 100 N/mm²	Nominal stress: ≤ Ø 7 = 110 N/mm² ≥ Ø 8 = 90 N/mm²	Nominal stress: ≤ Ø 7 = 100 N/mm² ≥ Ø 8 = 80N/mm²	Nominal stress: ≤ Ø 7 = 90 N/mm² ≥ Ø 8 = 70 N/mm²			
			Safety factor 4	Safety factor 5	Safety factor 5,7	Safety factor 6,4	Safety factor 7,1			
4 x 12	54079	S	400	320	280	250	230	10	16	0,35
5 x 15	54100	S	630	500	440	400	360	16	25	0,54
6 x 18	54333	S	900	720	630	570	510	22,4	36	0,78
6,3 x 19,1	53998	S	1010	790	700	635	570	25	40	0,86
7 x 21	54130	S	1250	1000	860	780	700	32	50	1,1
8 x 24	58778	P	1250	1000	920	820	710	32	50	1,4
9 x 27	58779	P	1600	1250	1160	1000	900	40	63	1,8
10 x 28	58780	P	2000	1600	1440	1250	1120	50	80	2,2
10 x 30	52303	P	2000	1600	1440	1250	1120	50	80	2,2
11,3 x 31	7984841	P	2500	2000	1800	1600	1400	63	100	2,85
13 x 36	58784	P	3350	2650	2430	2100	1890	85	132	3,8
16 x 45	7988746	P	5000	4000	3680	3270	2860	125	200	5,7

Other dimensions on request.

The nominal stresses and the limit stresses may not exceed the stresses specified in the respective mechanism groups.

Attention: Because of the austenitic materials with low hardness, reduction of the nominal stress and good lubrication of the chain will produce a satisfactory service life.
For continuous operation, a nominal stress of $\sigma_r = 80 \text{ N/mm}^2$ should not be exceeded for motor-driven hoists.

CORROSION PROTECTION COATINGS FOR RUD HOIS T CHAINS

Surfaces	Short description of surface coating	New condition
Natural dark blue oil polished	Thick oxide layer with corrosion protection oil	
Phosphated oil polished (POP)	Zinc phosphate with corrosion protection oil (5 µm)	
Electrolytic galvanised	Electrolytic metal deposition	
Corrud-DT coating	Inorganic zinc-plated coating with a combination of zinc and aluminium plates	
Topcoat SI	An organic high networked micro layer with prevailing ingredients of aluminum and epoxy resin	

STANDARD PACKING RUD HOIST CHAINS



- Disposable packaging RUD 1: 80 x 60 x 55 cm
- Disposable packaging RUD 2: 80 x 60 x 75 cm
- Disposable packaging RUD 3: 80 x 60 x 95 cm

Including VCI film for each packaging size.

RUD PORTAL FOR RUD HOIST CHAINS

THE RUD PORTAL IS OUR SECURE PLATFORM FOR OUR CUSTOMERS WITH ACCESS TO INFORMATION AND APPLICATIONS.

In our RUD portal, you will find everything you need for a safe and efficient use of hoist chains: from easy-to-understand operating instructions for the proper use of hoist chains to lubricant recommendations that optimize the lifespan of your chains. Discover our products in detailed product presentations and use our discard criteria to determine the wear level of your hoist chains. Our catalogs provide you with a comprehensive overview of our range of hoist chains and ensure that you are always up-to-date.



Easy registration:



www2.rud.com
or by email to:
hoistchains@rud.com

More information about RUD
hoist chains at:

www.hoistchains.rud.com



TEST CERTIFICATE – RUD HEBEZEUGKETTEN

UNIQUELY TRACEABLE FROM THE CUSTOMER TO THE STEEL MILL

Thanks to the RUD test certificate and the clearly identifiable stamping, RUD hoist chains guarantee 100% traceability. In addition to the chain RUD hoist chains guarantee 100% traceability. In addition to the chain type and quality, the production number (e.g., D24) and batch numbertype and quality, the production number (e.g., D24) and batch number (e.g., 002) are stamped on each chain. These numbers form the clearly identifiable manufacturing number printed on the test certificate. With identifiable manufacturing number printed on the test certificate. With these numbers we guarantee the clear allocation of the inspections these numbers we guarantee the clear allocation of the inspections and tests at RUD. Thus, we create a further security feature.


- **Grade designation + design**
Grade designation according to standard DIN EN 818-7 or according to other standards for hoist chains.
- **Quality**
The RUD quality designation.
- **Production and batch number**
RUD production and batch number for clear traceability of the chain.

RUD wheels and guides are the optimum solution for every hoist. Classic pocket wheels and X-drive wheels from RUD have optimally matched pocket numbers and are individually adapted to each customer requirement. RUD chain guides complement the portfolio and ensure a fully comprehensive complete package for every hoist.

Proven RUD design and know-how in the construction and production of chains, wheels and guides make the difference. We also design and produce wheels and guides for any hoist, regardless of the chain used.

INFORMATION REQUIRED FOR ORDERING RUD POCKET CHAIN WHEELS::

- Chain dimensions and number of pockets
- Hub length E + C
- Drill-Ø D with fit (if no details are given, fit H7 and bore chambers 1.5 x 45° are used)
- Groove for feather key DIN 6885 Bl. 1 P9 or IS9 or keyway with details about key insertion direction
- Possibly threaded hole for set screw with indication of position

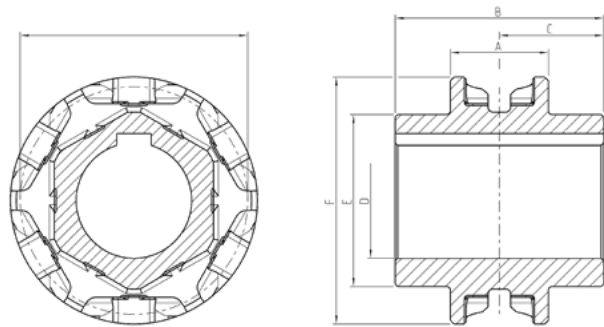


Chain d x t (mm)	Number of pockets	Pitch circle Ø	Crown width A	Max. boring B
5 x 15	5	48	25	20
7 x 21	6	81	35	40
9 x 27	6	104	45	50
13 x 36	6	139	65	70
16 x 45	6	174	80	90
23,5 x 66	5	212	88	95

Further wheel types available on request. The design and selection of shaft/hub coupling must be handled by the plant manufacturer in relation to the forces in play. Recommendation: $E \approx 1,7 \times B$

INDIVIDUALLY ADJUSTABLE FOR EVERY WHEEL AND EVERY CUSTOMER REQUEST.

- Chain dimension required for determination
- Pocket wheel required for determination

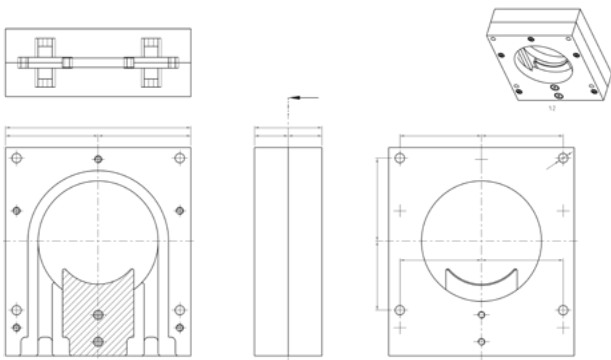


RUD LIMIT GAUGE FOR HOIST CHAINS

Manufacture	Motor driven Hoist	Manual driven Hoist	Article number
CM/Yale		×	7993866
CM/Yale	×		7996272
DEMAG (DK/DC+PK)	×		7101452
GIS	×		51622
HADEF		×	7995835
HADEF (AK+GEDI)	×		7900303
KITO		×	7994684
LIFTKET	×		7992010
J.D. NEUHAUS	×		62540
R.STAHL/STAHL CRANESYSTEMS	×		7994103
TIGER (T+VH)		×	7907394
VERLINDE/KONE/SWF	×		7993092
ABUS	×		7909386
INGERSOLL RAND	×		7913718

...SIMPLE SETUP FOR FAST RESULTS...




- Our RUD limit gauge consists of a sturdy aluminium strip with guide holes for the measuring pins as well as locking holes for the locking studs attached to the measuring pin.
- The size of the chain to be tested – $d_n \times t$ – is engraved below the guide holes.

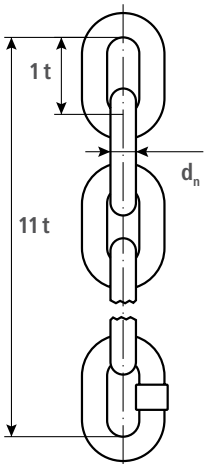


The two galvanised measuring pins provided with locking studs are located, together with the limit gauge, in a highquality softshell pocket.

d_n = Nominal diameter
 t = Inner pitch attachment
 $11t$ = Length over 11 links



Gauge to be introduced: chain is alright



Gauge cannot be introduced:
chain has to be replaced wear
> 2 % respectively 3 %

More information about the RUD limit gauge in our brochure or in RUD Portal.




Dynamic chain loading


Requirements per DIN EN 818-7

RUD meets the challenge of dynamic chain loading with the most modern fabrication and testing methods.

Example of dynamic chain loading in the hoist during the lifting cycle

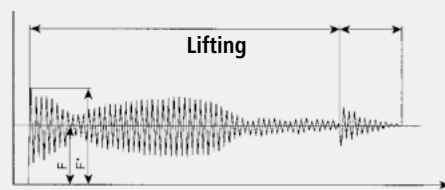

Dynamic chain testing in the pulsator

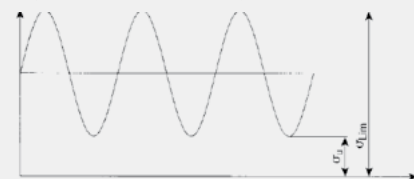


Traction relationship $R = \frac{\sigma_u}{\sigma_o} = 0,2$
 Limit vibration $n = 2 \times 10^6$
 Permitted limit traction $= \sigma_o = \sigma_{Lim}$

Wear testing

Parameter:

Load traction $\sigma_t = 100 \text{ N/mm}^2$
 Pocket number $Z = 5$
 Speed $v = 8 \text{ m/min}$.
 Dry, ungreased chain
 1 chain


A well lubricated chain and properly designed chain drive make for several times higher load alternation. As a rule of thumb: up to 15 times greater. The RTB quality can yield load cycles of up to 300.000.

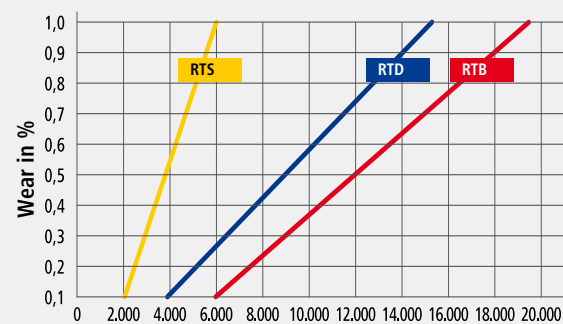

The quality classes relate to material, chain design and production process. Values given in case of test stand testing. Drive wheel, chain guide and scraper all designed and fabricated to the state of the art.

Tip: For RT chains, the load change number < 1000. Conditions such as abrasive dust reduce the load change number for all chains.

Surface hardness and hardness curve

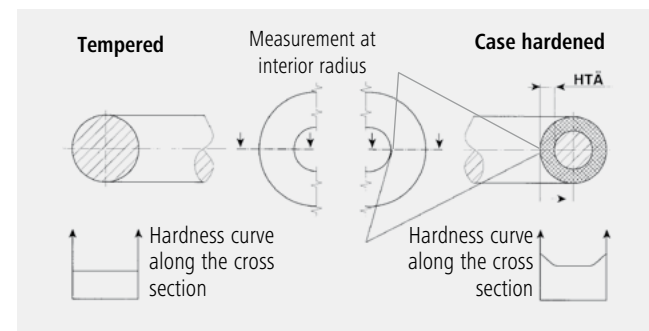


Example hardness curves


RTS quality = conventional heat treatment, low case hardening depth

RTD quality = modified fabrication process

RTB quality = chain with especially high wear resistance. In addition, this quality is optimised for vibration resistance.

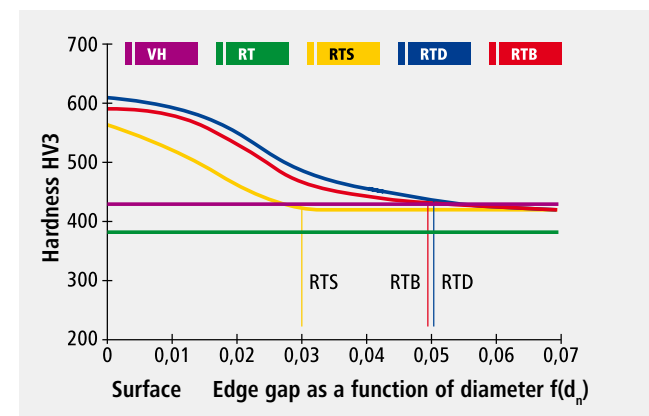

Traction - stretch diagram

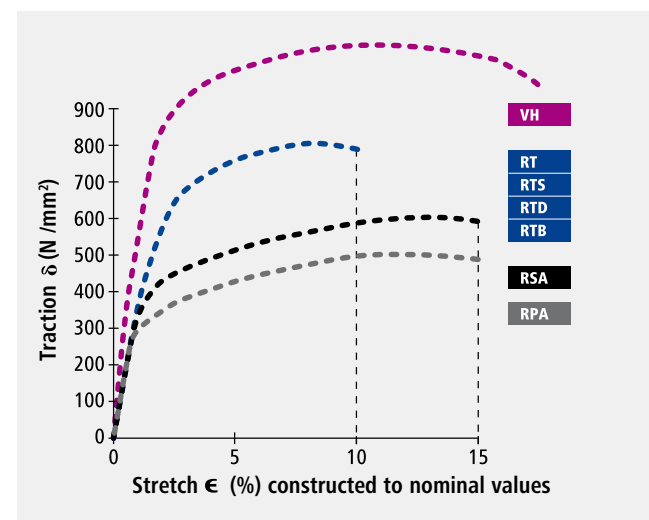

THE FUCHS LUBRITECH LUBRICANTS LISTED BELOW HAVE PROVED THEIR VALUE FOR LUBRICATING HOIST CHAINS IN PRACTICE.

STABYLAN 2001 Partly synthetic lubricant with creep and outstanding lubricating qualities, as well as excellent corrosion proofing. Application range -15°C to +150°C. Available as spray, open canisters or drums. Tried and tested **standard RUD lubricant** for general applications.

CEPLATTYN 300 Graphite paste with high-pressure and adhesion agents, creates an almost dry dust-repellent solid lubricant film, application from -30°C to +250°C. Available in open containers or as spray. **For use per mining hygiene regulations (GesBergV) above and below ground.**

STABYLAN 5006 Fully synthetic high temperature chain lubricant (chain honey) **for extreme temperatures up to 240°C**. Salt water resistant, mineral oil resistant, penetrates and displaces water, outstanding adhesion. Available as a spray, in canisters and drums.

CASSIDA CHAIN OIL 1500 Fully synthetic high performance chain lubricant with very good adhesion and extreme resistance to being washed off. Temperature range -10°C to +140°C. Available in canisters, drums, or as a spray. Listed per NSF H1 and suited **to use in the vicinity of food**. Especially suited to meat processing applications, approved for KOSHER and HALAL processing.


DECORDYN 350 High adhesion corrosion proofing film with good lubrication qualities, for temperatures -40°C to +70°C. used in **wind power installations, offshore** and for general protection in aggressive environments.

YOUR CONSULTANCY PARTNER

FUCHS LUBRITECH GMBH Phone: +49 (0) 6301 3206-0
 Werner-Heisenberg-Straße 1 Mail: lubritech@fuchs.com
 67661 Kaiserslautern <https://www.fuchs.com/lubritech/>

Chain lubrication - An important contribution to reducing wear


WITHOUT CHAIN LUBRICATION LOAD CYCLES WITH UNLUBRICATED CHAIN:

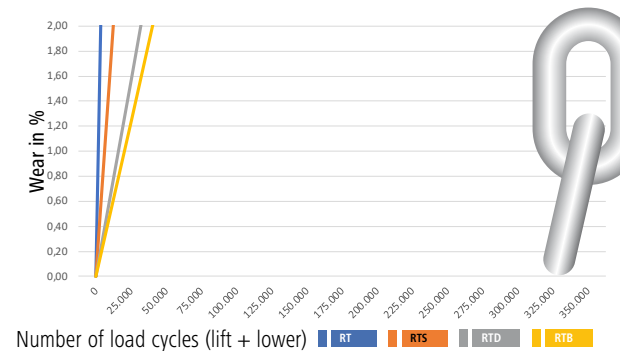

- When running over drive and reversing wheels, the chains links are angled under load.
- In order to minimise the resulting joint friction, hoist chains should be lubricated at regular intervals according to the conditions of use.

The indicated load cycles are achieved with a ungreased chain with load traction force of 100 N/mm², pocket wheel Z = 5 and speed V = 8 m/min.

REGULAR CHAIN LUBRICATION LOAD CYCLES WITH LUBRICATED CHAIN:

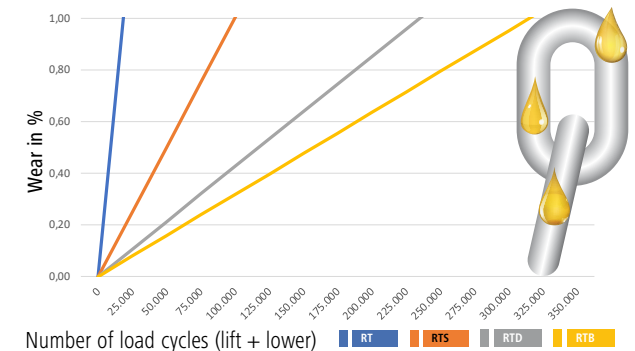

- Through a regular lubrication a 15-20 times higher number of cycles can be obtained than with a dry, unlubricated chain.
- During lubrication, ensure that the lubricant penetrates into the chain links most susceptible to wear.

The indicated load cycles are achieved with a ungreased chain with load traction force of 100 N/mm², pocket wheel Z = 5 and speed V = 8 m/min.



RUD Conveyor & Drive North America

29 Prince Andrew Pl, North York, ON M3C 2H2 Canada

Phone: +1 416-900-3271

Email: info@rud-cd.com

www.rud-cd.com

USA Warehouse

2145 Internationale Parkway Suite-800 Woodridge, IL 60517, USA

Phone: +1 779-232-1846

Email: info@rud-cd.com

www.rud-cd.com

RUD Ketten

Rieger & Dietz GmbH u. Co. KG

Friedensinsel

73432 Aalen / Germany

Phone +49 7361 504-1382

Mail: hoistchains@rud.com

Web: hoistchains.rud.com

